



STANDARD HORIZON

INSTRUCTIONS

The Standard Horizon 240SW is a white Public Address (PA) speaker used with Horizon radios and hailers, The 240SW speaker comes with mounting hardware and a 13 inch split cord for connections.

SPECIFICATIONS


Maximum Input Power.....	40Watts Voice
Impedance.....	4 Ohms
Dimensions.....	7,125D x 4.7W x 6.9H
Frequency Response.....	50 - 7500 Hz
Sound Pressure Level @ 1M.....	103dB

BRACKET INSTALLATION

The 240SW is supplied with high impact plastic mounting bracket, two stainless screws, two nuts, two washers and six mounting screws, The bracket may be mounted on any flat surface of material strength that will support the self-tapping screws. Determine the speaker location so that the cord, including additional speaker wire may be used to reach the audio source. Use the bracket as a template, and drill six starter holes into the flat surface. Position the bracket over the starter holes and fasten with the screws. Insert the two stainless steel screws into the corresponding holes going through the speaker and mounting bracket. Install the washers and nuts, then position the speaker to the desired angle, Tighten the stainless steel screws. Do not over-tighten the stainless steel screws, otherwise the bracket may crack.

PARTS LIST

Description	BRL 0085014
Mounting Bracket	

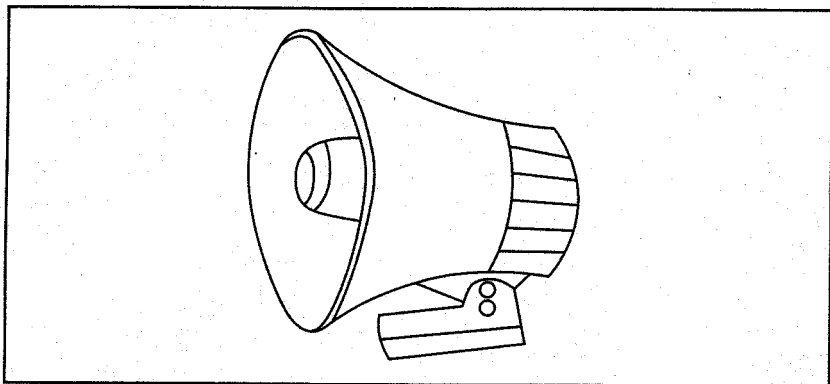

240SW PA SPEAKER